



newsletter

City of Evanston Public Works Agency

City of Evanston

Main Street Improvement Project – West City Limits to Hartrey Avenue

April 25, 2019

Project Description

The City of Evanston is beginning the Main Street Improvement Project. This project includes the traffic signal modernization of an existing signalized intersection at McDaniel Avenue and a new traffic signal at the east most driveway, by the Food 4 Less area, for both pedestrian and vehicle operation and safety. The project also consists of extending the sidewalk on the south side of the street from the shopping center to Hartrey Avenue, new LED street lights, some tree removal and replacements, reconstruction of the eastbound Main Street pavement, roadway cross slopes corrections, driveway entrances reconstruction, resurfacing the roadway and improved lane lines and pavement markings

Project Schedule

The project is expected to start the **week of May 6, 2019**, weather permitting, and be completed by the end of the year. During construction, one lane of traffic in each direction will be maintained on Main Street. To maintain access at all times to the shopping center, businesses and side streets, construction will occur in several phases as shown in the attached construction staging plan. At areas where there is parking that needs to be removed for construction, NO PARKING signs will be posted 48 hours prior to start of work. The construction activities will create some inconveniences for the abutting businesses and residents, but every effort will be made to minimize these issues. Any irrigation sprinkler system should be identified and marked with a flag by the property owner prior to the start of construction to prevent damages to the private system.

Contractor


The contractor for this improvement project Landmark Contractors, Inc., (11916 W. Main St., Huntley, IL 60142). The contractor is contractually responsible for the means and methods of the work.

Project Monitoring

The City has retained Stanley Consultants, Inc., to monitor the project. If you have any questions or concerns during construction, please contact the Resident Engineer, Ben Pedrigi, at (708) 207-1952. Questions about the project in general should be directed to Rajeev Dahal, Senior Project Manager at 3-1-1 or (847) 448-4311.



City of
Evanston™

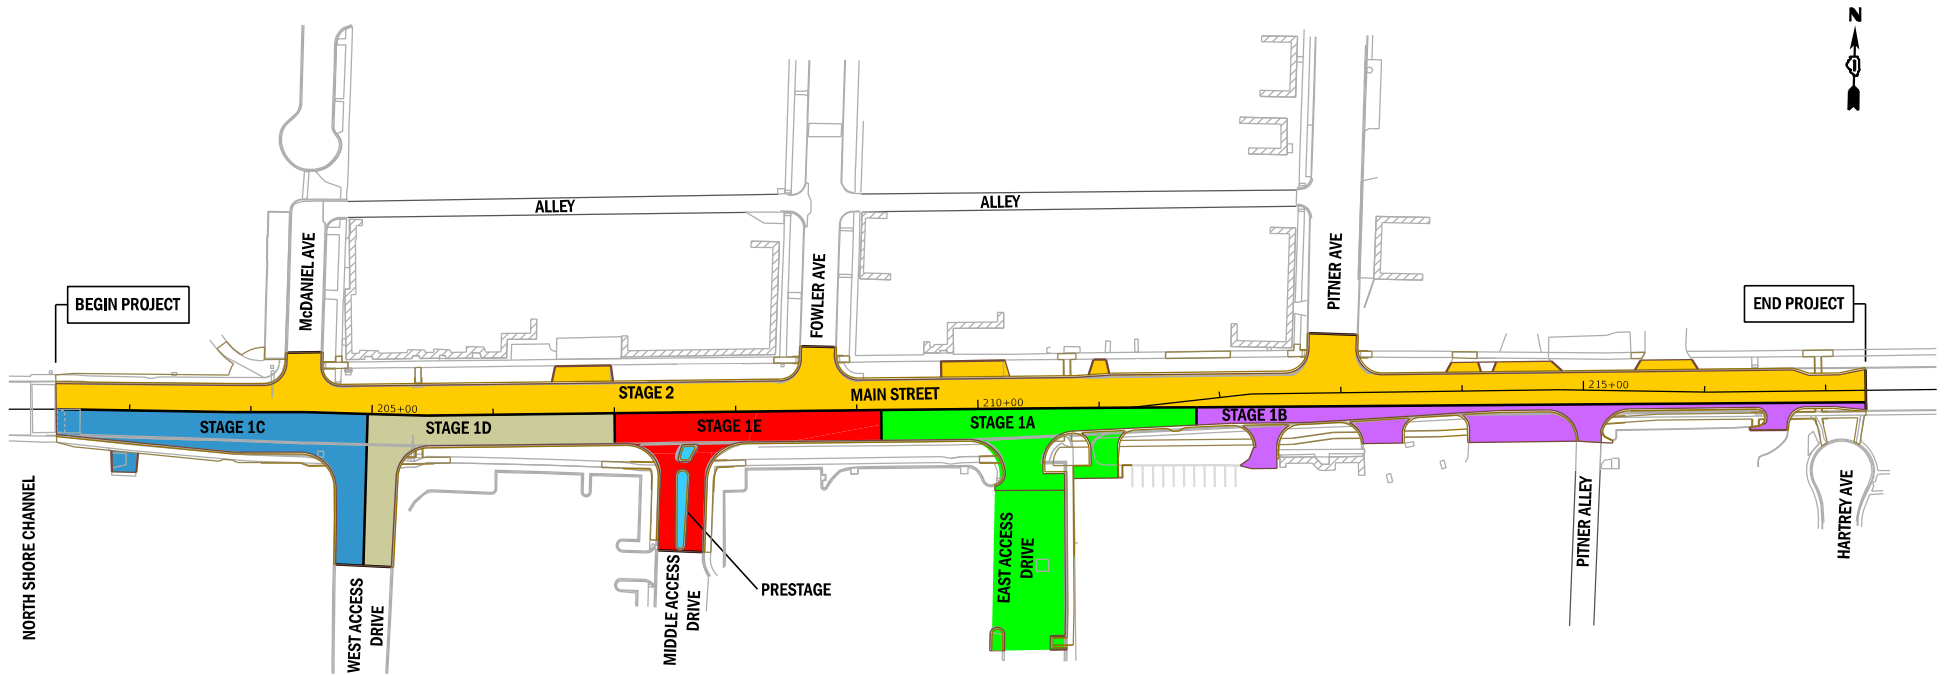

- | | | | |
|--|--|--|---|
|  <p>PRESTAGE: (2 WEEKS)
 - REMOVE MEDIAN AND INSTALL TEMPORARY PAVEMENT
 - INSTALL TEMPORARY TRAFFIC SIGNALS</p> |  <p>STAGE 1B: (1 MONTH)
 - RECONSTRUCT EASTBOUND MAIN STREET
 - RECONSTRUCT COMMERCIAL DRIVEWAYS</p> |  <p>STAGE 1D: (1 MONTH)
 - RECONSTRUCT EASTBOUND MAIN STREET
 - RECONSTRUCT 1/2 WEST ACCESS DRIVE
 - ONE-WAY OUTBOUND ON WEST ACCESS DRIVE</p> |  <p>STAGE 2: (1 MONTH)
 - RECONSTRUCT WESTBOUND MAIN STREET
 - RESURFACE MAIN STREET
 - INSTALL TRAFFIC SIGNALS</p> |
|  <p>STAGE 1A: (1 MONTH)
 - RECONSTRUCT EASTBOUND MAIN STREET
 - RECONSTRUCT EAST ACCESS DRIVE</p> |  <p>STAGE 1C: (1 MONTH)
 - RECONSTRUCT EASTBOUND MAIN STREET
 - RECONSTRUCT 1/2 WEST ACCESS DRIVE
 - ONE-WAY OUTBOUND ON WEST ACCESS DRIVE</p> |  <p>STAGE 1E: (1 MONTH)
 - RECONSTRUCT EASTBOUND MAIN STREET
 - RECONSTRUCT MIDDLE ACCESS DRIVE</p> | |

**MAIN STREET CORRIDOR IMPROVEMENTS
 CONSTRUCTION SEQUENCE**